




PANEL SPECIFICATION

Norfoam Panels are manufactured on a continuous laminating line where the skins are attached to an expanded polystyrene core (EPS) by the automated application of a two part polyurethane foam adhesive, and automatically cut to length.

SKINS	0.4mm or 0.6mm G300 Z275 Colorbond Steel
CORE	Expanded Polystyrene (EPS) SL Grade 13.5kg/m ³ AS 1366-1982
ADHESIVE	Two part Polyurethane
THICKNESS	50, 75, 100, 125, 150, 175, 200, and 250mm
LENGTH	To order. Only governed by handling and transport considerations.
WIDTH	1200mm standard
EDGE TYPE	Male Female Roll formed Edge

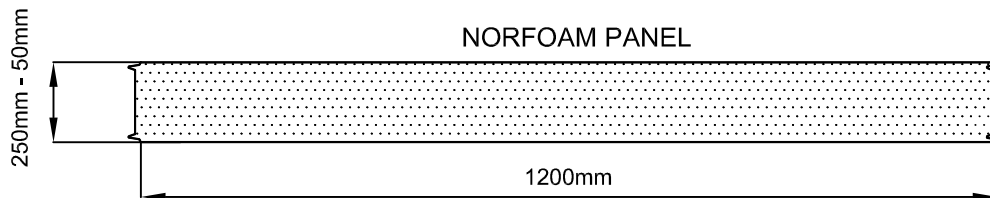

PANEL WEIGHT Table 1:

THICKNESS	50	75	100	125	150	175	200	250
Kg/m ² 2.4mm	7.8	8.2	8.5	8.8	9.1	9.5	9.8	10.5
.6mm	10.7	11.1	11.4	11.7	12.1	12.4	12.8	13.4

R VALUE

Panel Thickness	50mm	75mm	100mm	150mm	200mm	250mm
R Value (w/m ² k)	1.28	1.92	2.56	3.85	5.13	6.41

Townsville
123 Enterprise Road
Bohle, QLD 4818



(07) 4774 4983

www.norfoam.com.au